

ASSEMBLY INSTRUCTIONS FOR YOUR RECTANGULAR 10 - LIGHT CHANDELIER


IMPORTANT SAFETY INSTRUCTIONS:

- *These instructions are provided for your safety. It is important that they're read completely before beginning installation.
- *WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.**
- *Turn off power at switch before replacing bulbs, making sure fixture and bulbs have had sufficient time to cool down.
- *DO NOT subject the fixture to any shock while lit as shattering of bulb may result.

ASSEMBLY INSTRUCTIONS

1. SHUT OFF MAIN ELECTRICAL SUPPLY AT FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts from carton. Do not throw away any parts.
3. Remove mounting plate (B) from canopy (D) by removing canopy screws (E). Set canopy screws (E) aside.
4. Affix mounting plate (B) to ceiling outlet box with mounting plate screws (C), provided. Additional mounting screws (provided) should be inserted through holes (N) in mounting plate (B) for added support.
5. Measure desired drop for fixture to hang and add/remove extension tubes (I) as needed. Guide wiring through extension tubes before threading tubes together.

TO ADD/REMOVE EXTENSIONS: (Un)Thread the threaded nipple of one extension into the threaded opening of the next extension. Make sure wiring is pulled tight when threading extensions together to prevent damage to the wire

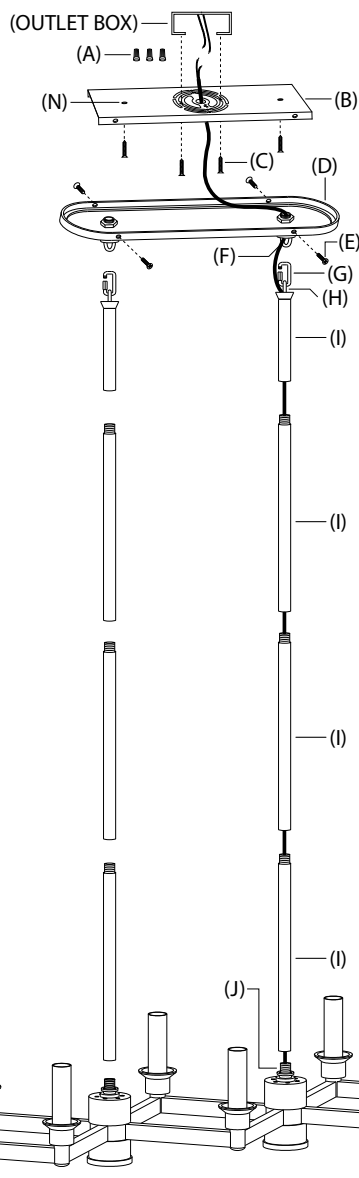

6. Connect loops (F) and loops (H) using quick links (G).
7. Thread bottom extension tubes (I) onto the threaded nipples (J).
8. Guide wiring from top extensions (I) through loops (H), quick links (G) and loops (F). Lift canopy (D) to ceiling outlet box.
9. Make proper electrical connections described in steps 10 - 12.
10. Attach ground wire from fixture (green or silver in color) to ground wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
11. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
12. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
13. Carefully push wire connections back into ceiling outlet box.
14. Place canopy (D) over mounting plate (B). Thread canopy screws (E) into holes in canopy (D), and mounting plate (B) to secure fixture to ceiling.
15. Insert ten 40W MAX. B9.5 Candelabra base bulbs into sockets (K).

DOWN LIGHT RE-LAMPING INSTRUCTIONS

1. Remove light cover (M) from housing (L) by turning it in a counter clock wise motion.
2. Remove the old blub and replace it with a T-8 Candelabra base bulb.
3. Thread light cover (M) back onto housing (L). Turn until hand tight.

To clean use soft cloth only. Do not use chemical or abrasive cleaners.